



## CO - SS02B STUDIO SIGNALBOX

CO-SS02B Studiosignalbox (also named cough-box) is made to be placed on the table in the studio. It has three functions:


1. **Earthing the cough-relay in the CO-SCC103 to mute the microphones.**
2. **ON AIR light. (red-light to show when any microphone in the studio is on air.)**
3. **Set off the buzzer in the controlroom to get the attention of the operator.**

It is developed to work together with the Studio Control Center, CO – SCC103, but can of course be used with other type of equipments.

### Connections XLR-5M:

- Pin 1: Common (earth, must be negative when using 99.20042)
- Pin 2: Cough relay
- Pin 3: Buzzer in the controlroom
- Pin 4: 24V to On Air lamp (must be positive when using 99.20042)
- Pin 5: NC

### CO - SS02B STUDIOSIGNALBOX SCHEMATIC 060392 COM

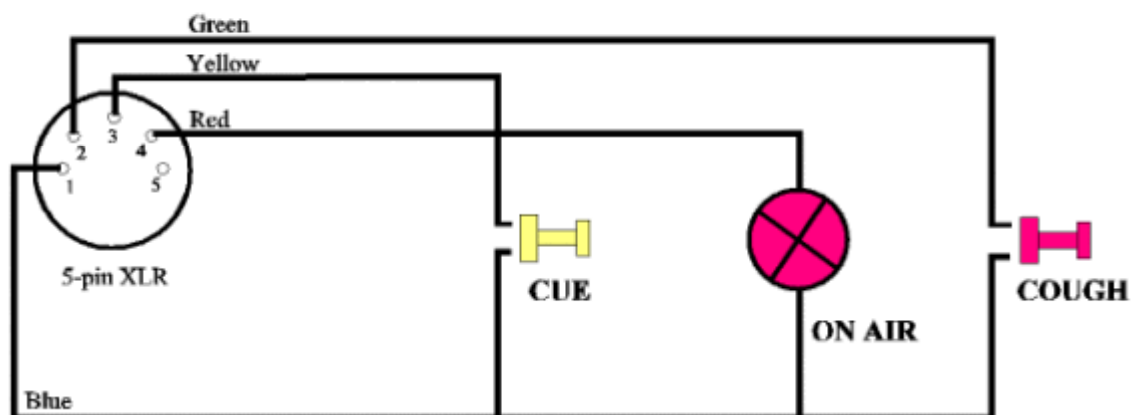

#### ON AIR LAMP:

Product no: 99.20041: 28V/24mA CM6839

99.20042: 24V/20mA LEDLAMP 177B016R1R510D